

northstar
ROBOTICS & DRONES

SAMPLE REPORT · ILLUSTRATIVE DATA

SITE INSPECTION REPORT · WEEK 06

Sample Site, Tower A

What the fleet captured this week, what changed since last week, and what needs attention first.

SITE	PERIOD	CAPTURES	PREPARED BY
Sample Site	Week 06	Air + ground	Northstar

This is a sample. The site, issues and figures are invented to show the format of a Northstar weekly report. They do not describe a real project or a real result.

Summary

One drone pass over the whole site and two quadruped patrols through the basement levels, compared with last week's captures and the construction schedule.

NEEDS ACTION	TO REVIEW	ON PLAN	CAPTURES
2	3	4	3
High-priority issues	Medium issues	Zones matching schedule	1 flight · 2 patrols

Issues, ranked

#	ISSUE	WHERE	FOUND BY	PRIORITY
1	Guardrail missing on slab edge	Level 7 · east edge	Drone pass	HIGH
2	Exit route blocked by stored materials	Basement B1 · stair 3	Quadruped patrol	HIGH
3	Standing water near pump pit	Basement B2	Quadruped patrol	MEDIUM
4	Rebar stockpile outside laydown zone	North yard	Drone pass	MEDIUM
5	Façade panel gap wider than adjacent panels	Level 4 · west face	Drone pass	MEDIUM


Progress against plan

ZONE	ACTIVITY	CAPTURED VS PLANNED	STATUS
Block A	Level 7 slab		ON PLAN
Block B	Façade, levels 3-5		BEHIND
Block C	Slab pour, level 2		ON PLAN
North yard	Earthworks		ON PLAN
Basement	Services rough-in		ON PLAN

Bar = share of the planned work visible in this week's capture. Line = where the schedule expects it to be.

High-priority issues

Each issue comes with the capture it was found in, where it is, and a suggested next step for the site team.

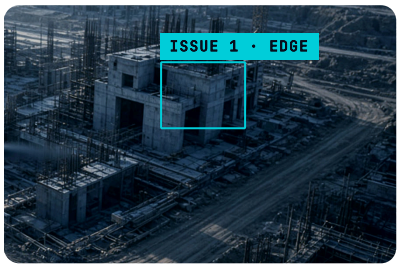


Guardrail missing on slab edge

HIGH

DRONE PASS · LEVEL 7 · EAST EDGE

A section of edge protection present last week is not visible in this capture.

Suggested action	Reinstate edge protection before work resumes on Level 7.
Compared with	Week 05 capture, same route

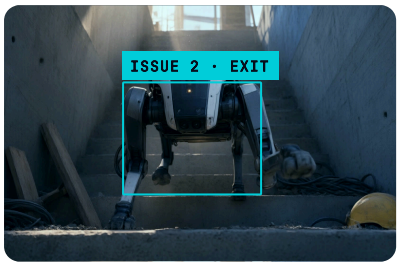


Exit route blocked

HIGH

QUADRUPED PATROL · BASEMENT B1 · STAIR 3

Stored materials narrow the stair 3 exit route below the marked width.

Suggested action	Clear the route and move materials to the laydown zone.
Compared with	Patrol two days earlier, same route

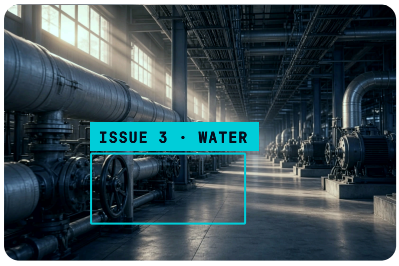

Standing water near pump pit

MEDIUM

QUADRUPED PATROL · BASEMENT B2


Water pooled across the walkway beside the pump pit on both patrols this week.

Suggested action	Check the pump and drainage; mark the walkway until dry.
Compared with	Not present in week 05

Week on week

Every pass flies the same route, so captures line up and changes can be compared side by side.



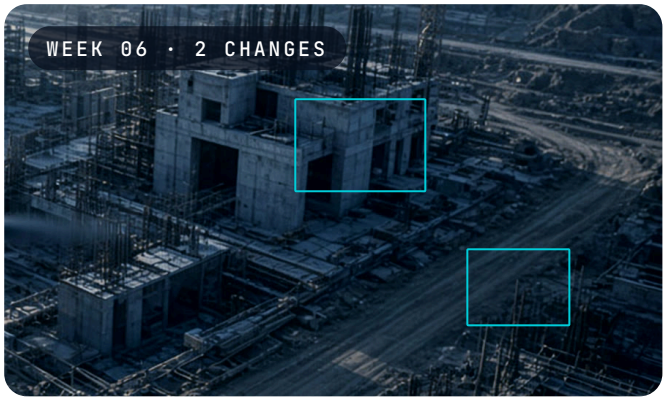

What was captured

- One drone pass over the whole site on a fixed route (RGB and LiDAR)
- Two quadruped patrols through basement levels B1 and B2
- Every capture logged with time, route and sensor

What you receive

- This report, every week
- Access to the platform: 3D model, map and compare view
- Issue list you can export and share with subcontractors

About this sample. A Northstar weekly report follows this format. This one uses an invented site, invented issues and invented figures, so the format can be shared publicly. The images are illustrative. Ask us for a walkthrough on a site like yours.